

SRS-T 4A

SRS-T 8A

REGOLATORI DI VELOCITÀ AD AUTOTRASFORMATORE TRIFASE

THREE PHASE TRASFORMER SPEED REGULATORS



DESCRIZIONE

Variatori di tensione, manuali ad autotrasformatore con selettore a 5 velocità preimpostate. Assenza di ronzio elettrico nel motore. Adatti a motori asincroni trifase regolabili.

CARATTERISTICHE TECNICHE

- Alimentazione 400V-3Ph-50/60Hz.
- Corrente nominale:
SRS-T 4A max 4A / SRS-T 8A max 8A.
- Spia di funzionamento.
- Contenitore in lamiera d'acciaio verniciata epoxy RAL7035.
- Protezione IP54.
- Temperatura d'esercizio -20°C +40°C.
- Solo per uso interno.
- Peso 18/27 kg.

DESCRIPTION

Manual voltage variator by self-transformer selector, 5 step options. Minimum magneto hum in the motor. Suitable for three phase asynchronous speed adjustable motors.


TECHNICAL SPECIFICATIONS

- Supply 400V-3Ph-50/60Hz.
- Rated current:
SRS-T 4A max 4A / SRS-T 8A max 8A.
- Pilot light.
- Box in epoxy painted steel sheet RAL7035.
- Protection IP54.
- Operating temperature -20°C +40°C.
- For indoor use only.
- Weight 18/27 kg-


Serie di tensione - Voltage							
Posizione della manopola Knob position	0	-	1	2	3	4	5
Uscita regolata [VAC] - Regulated output [VAC]							
Versione L40 L40 version	0	-	130	180	230	300	400
Uscita non regolata [VAC] - Unregulated output [VAC]							
L1	0	230	230	230	230	230	230

Cablaggio e connessioni - Wiring and connections	
Pe	Terminale di terra Earth terminal
R	Alimentazione 3*400 VAC / 50—60 Hz Power supply 3*400 VAC / 50—60 Hz
S	
T	
N	Neutro Neutral
L1	Uscita non regolata, fase (230 VAC / 50—60 Hz / 2 A) Unregulated output, fase (230 VAC / 50—60 Hz / 2 A)
U	Uscita regolata al motore
V	
W	

Modello Model	A	B	C	D	E
	(mm)				
SRS-T 4A	300	425	185	255	355
SRS-T 8A	300	425	235	255	355

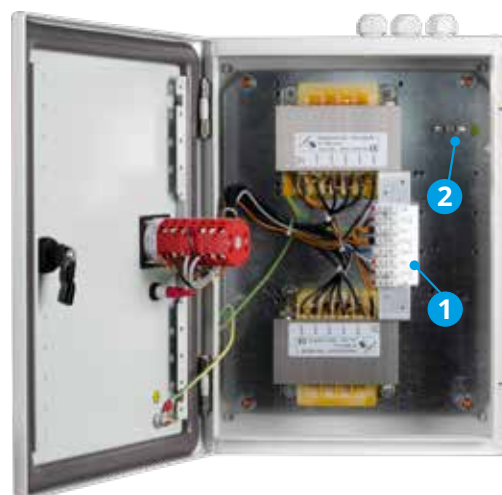

1 Morsetteria
Terminal block



2 Terminali di terra
Earth terminal



DIMENSIONI - DIMENSIONS

